



01/17/2023



To:
Clarinda CSD
Julia Harris
423 East Nodaway
Clarinda, CA 51632

Project:
Holding Cart-Clarinda
423 EAST NODAWAY
Clarinda, IA 51632

From:
Rapids Wholesale
Yvonne Paup
6201 S Gateway Drive
Marion, IA 52302
319-447-1670
319-373-7285 (Contact)

Please note that the pricing reflected on this quote is valid for ONLY 30 DAYS
from date on the quote

Please discuss any concerns with your Sales Representative

Item	Qty	Description	Net	Net Total
1	1 ea	HEATED HOLDING PROOFING CABINET, MOBILE  Metro Model No. C5E9-CFC-U Quick Ship - C5 E Series Heated Holding & Proofing Cabinet, mobile, full height non-insulated, clear polycarbonate door, bottom mount control module, 80° to 190°F operating temperature range, universal wire slides on 4-1/2" centers, adjustable on 1-1/2" increments, (12) 18" x 26" or (24) 12" x 20" x 2- 1/2" pan capacity, 5" casters (2 with brakes), aluminum, 120v/60/1, 2,000 watts, 16.7 amps, NEMA 5-20P, cULus, NSF, Made in USA, Made in Mexico	\$1,932.32	\$1,932.32
	1 ea	1 year warranty against manufacturing defects		
			ITEM TOTAL:	\$1,932.32
2	1 ea	MOBILE HEATED CABINET  Vulcan Model No. VHFA18 Heated Cart, mobile, non-insulated, capacity (18) 18" x 26" x 1" sheet pans or (36) 12" x 20" 2-1/2" steam table pans, fan & air tunnel, fixed tray slides 3" OC, glass door, stainless steel construction, 5" casters; 2 swivel, 2 rigid with locks, 120v/60/1-ph, 2.0kW, 16.7 amp, cord with NEMA 5-20P, cULus, UL EPH	\$2,553.60	<Alternate>
			ITEM TOTAL: <Alternate>	\$2,553.60
3	1 ea	MOBILE HEATED CABINET	\$2,697.50	<Alternate>

Holding Cart-Clarinda

Clarinda CSD

Initial: _____
Page 1 of 3



C5™ 1 Series Heated Holding Cabinet, mobile, full height, non insulated, clear polycarbonate door, removable bottom mount control module, thermostat to 190°F, fixed wire slides on 3" centers (18) 18" x 26" or (34) 12" x 20" x 2 1/2" pan capacity, 5" casters (2 with brakes), aluminum, 120v/60/1 ph, 2000 watts, 16 amps, NEMA 5 20P, cULus, NSF

1 ea 1 year warranty against manufacturing defects

<Alternate>

ITEM TOTAL: <Alternate>

\$2,697.50

Merchandise	\$1,932.32
Freight	\$208.94
Subtotal	\$2,141.26
Total	\$2,141.26



Lease-to-Own

12-month term: \$188.75*
18-month term: \$129.10*
24-month term: \$99.31*
30-month term: \$81.45*
36-month term: \$69.59*
42-month term: \$61.13*
48-month term: \$54.82*
60-month term: \$46.02*

For more information, visit
[LEAF HRFG Credit Application](#)
or contact:

ERIC CHESSER
Office: 410-933-8138
Mobile: 410-830-9497
echesser@leafnow.com

JOE BURNS
Office: 410-933-8138
Mobile: 410-977-2608
jburns@leafnow.com

ROB WASSON
Office: 410-933-8135
Mobile: 410-977-2607
rwasson@leafnow.com

* Payments are subject to change based on credit approval.

to taxing or custom authorities), all sales, use, value added, excise and all other federal, state or local or foreign taxes, import or customs fees and duties associated with an order, however designated, except for Seller's franchise taxes and taxes on Seller's net income. If applicable, a separate charge for taxes will be shown on Seller's invoice. Some taxes may not be known at the time of quotation. These taxes will be added to the final contract amount and Purchaser agrees to pay all such taxes.

Freight: Freight charges unless otherwise noted includes only delivery to dock or curbside, all unloading, set in place and leveling by customer. Lift gate delivery is available at an additional charge.

Inspection of Freight: To protect your investment, the bill of lading must only be signed after the merchandise is inspected. If this step is not taken and damage has occurred, there is no recourse with the freight company for resolution or reimbursement.

Prices: Prices are good for 30 days unless otherwise stated

Returns: No returns will be accepted without prior written authorization of the Seller. Returns are subject to a minimum 30% restocking charge. Purchaser shall be responsible for the cost of freight to return products. Notwithstanding the foregoing, no returns are permitted with respect to custom design and fabricated equipment and furniture.

Specific Exclusions: Unless otherwise stated the pricing on this contract is for equipment only and does not include freight, tax, delivery or set in place. In addition all electrical, mechanical, HVAC, plumbing materials and labor, and the fees permits and licenses associated with such work are excluded unless otherwise indicated. This exclusion includes but is not limited to the following: 1. Plumbing, gas piping, refrigeration drainline installation, hanging of hand sinks, all faucet and garbage disposal installation and setup, 2. Caulking of sinks, tables and other items, 3. Plumbing, electrical and other final connections, 4. Ductwork and all penetrations within building, and all balancing of exhaust hoods and makeup air, 5. Walkin cooler/freezer piping and penetrations, hanging of evaporator coils, condenser and compressor placement, defrost timer connection and all necessary heat tape, 6. Floor tile, grout, concrete, grout leveling, and concrete leveling. 7. Concrete curbs, concrete filler, and/or sand filler. 8. Supports/blocking for FS equipment. 9. Insulation, vapor barrier, and wear slabs at the freezers and coolers.

Terms & Conditions: Our standard terms require 100% payment in advance of merchandise shipping. If buyer chooses to use a credit card for payment 4% will be added to the sell price of the contract. Terms other than this will require credit applications and trade references, which may take up to 3 weeks to complete. Final contract will require signature and completion of our standard contract form which includes all terms and conditions as stated on the face page of the Seller's Conditional Sales Contract or AIA Contract documentation as appropriate.

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$2,141.26

Metro® C5 E-Series Non-Insulated Heated Holding & Proofing Cabinet

Metro C5 E Series Non-Insulated Heated Holding and Proofing Cabinet provides the right mix of features to economically hold & proof in the same cabinet.

Reliability: The "right" essential features from a trusted brand. Reliability and quality are designed in from the ground up, high-quality components provide a long life of worry free use.


Dual Purpose: Convenience to hold hot food or proof in the same cabinet. Simply flip a switch to go from one mode to another.

Flexibility: Adjustable universal slides provide maximum flexibility to hold different pan styles in the same cabinet. Adjustable on 1-1/2" increments, holds 12" x 20" pans, GN 1/1 and 2/1 pans, and 18" x 26" sheet pans. Wire shelf accessory can also be added to accommodate other items.

More Power: 2000 watts of power for increased performance and food safety in holding applications. Forced convection design gently circulates hot air for improved temperature consistency. Thermostatically controlled, 80°F (27°C) to 190°F (88°C) operating temperature range.

Clear Door: Clear polycarbonate door provides visibility to the interior contents without the heat loss associated with opening the door.

Quick Access, Field Reversible Door: Easy-to-grab magnetic pull latch provides fast, easy, efficient access to food. Field reversible with high quality adjustable gasket seal.

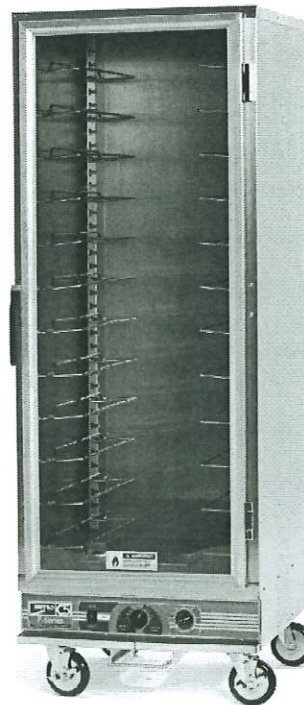

Holding & Proofing Capabilities in the Same Cabinet.



Easily change from holding to proofing with the flip of a switch.

Reliable electro-mechanical control of temperature & humidity.

Reliable analog thermometer.

Metro Heated cabinets are for hot food holding applications only.

All Metro Catalog Sheets are available on our website: metro.com

LO2-222 | 10/24

Information and specifications are subject to change without notice.
Please confirm at time of order.
Copyright © 2024 InterMetro Industries Corp.

metro.com

North Washington Street, Wilkes-Barre, PA 18705

Product Information. U.S. and Canada: 1.800.992.1776

Outside U.S. and Canada: metro.com/contactus

C5 E-Series®

Non-Insulated Heated Holding & Proofing Cabinet

Specifications

Cabinet Material: .063" (1.8mm) thick aluminum body with .125" (3.2mm) aluminum base.

Casters: Plate mounted, 2 swivel and 2 swivel with brake. 5" (127mm) diameter donut neoprene wheel. Double ball bearing swivel, ball bearing axle, nickel plated.

Door: Extruded aluminum frame with 0.90" (2.3mm) polycarbonate window. Field reversible, 180° swing.

Door Latch: Polymer, high-strength magnetic latch with lever-action release.

Door Gaskets: High temperature, door mounted, Santoprene gasket. Removable without tools.

Door Hinges: Field reversible, double hinged, 180° swing with long-life nylon bearings.

Universal Pan Slides: ¼" (6.4mm) diameter nickel-chrome electroplated wire, adjustable on 1-½" (38mm) increments.

Control Module: Thermostatically controlled with tubular heating elements, ball bearing blower motor, and ducted air system. 2000W of power in hold mode, 720W in proof mode. Removable with tools for cleaning & service.


Cord: 7½' power cord with NEMA 5-20P plug end for 120V, NEMA 6-15P plug end for 220-240V.

Drip Trough: Aluminum drip trough with polymer catch pan.


Accessories

(Ship separately)

- **Small Item Shelf** (C5-SHELF-S)
- **Universal Slide Pair** (C5-USLIDEPR-C)

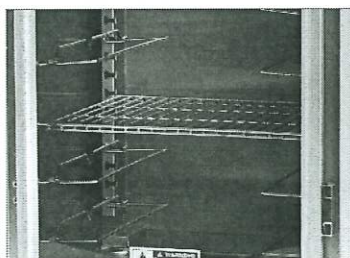

Dimensions

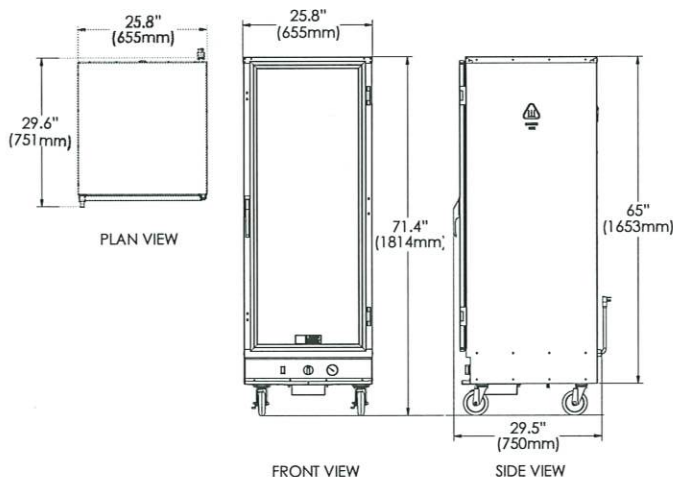

120V Electrical & Model Number
16A, 60Hz, 2000W



C5 E 9 - C FC - U

220-240V Electrical & Model Number
7.6-8.3A, 50/60Hz, 1681-2000W



C5 E 9 - C X FC - U


Pan Capacities

Slide Pairs		Sheet Pans	Steam Pans			Gastronorm					
						65mm Depth		100mm Depth		150mm Depth	
Provided	Max	18"x26"	12"x20"x2.5"	12"x20"x4"	12"x20"x6"	2/1	1/1	2/1	1/1	2/1	1/1
12	35	12*	24*	24	14	12*	24*	12	24	7	14

Note: Maximum number of slide pairs @ 1.5' spacing. Additional slide pairs ordered separately.

* With additional slide pairs, can accommodate up to: (35) 18x26, (36) 12x20x2.5 or GN 1/1 65mm, (18) GN 2/1 65mm



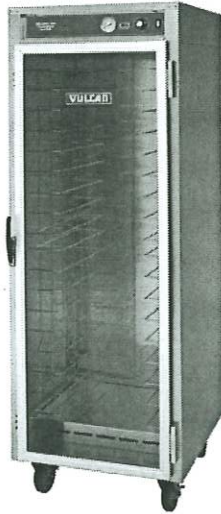

Model VHFA18



SPECIFICATIONS

Eighteen level holding and transport cabinet, Vulcan Model No. VHFA18. Heavy duty 20 gauge polished stainless steel cabinet. Four 5" casters, 2 swivel with brakes, 2 rigid. Glass door with heavy duty hinges, door latch mechanism, and gaskets. Interior pan supports are designed to accommodate pan covers for transporting, and are removable for easy cleaning. Accepts eighteen 18" x 26" pans or thirty-six 12" x 20" x 2³/₄" pans. Top mounted, control panel includes power "on" and heater "on" indicator lights, dial thermostat adjusts from ambient to 190°F, and temperature read-out dial. Two 1,000 watt metal sheathed heating elements, 16.7 amps total draw. One year limited parts and labor warranty. After the first year, 10-year parts warranty on the heating elements. Requires 120 volt, single phase power supply. Furnished with top mounted 8 foot power cord with strain relief and NEMA 5-20 plug.

Exterior Dimensions:

25¹/₄"w x 30³/₄"d x 71"h

UL Listed. Classified by UL to NSF Std. #4.




STANDARD FEATURES

- Eighteen level holding and transport cabinet accepts eighteen 18" x 26" pans or thirty-six 12" x 20" pans, pans may be up to 2³/₄" tall.
- Heavy duty 20 gauge polished stainless steel cabinet.
- Set of 5" casters, two swivel with brakes and two rigid.
- Full size glass door with field reversible heavy duty hinges, door latch mechanism, and gaskets.
- Fixed interior pan supports are designed to accommodate pan covers for transporting, and are removable for easy cleaning.
- Top mounted, control panel includes power "on" and heater "on" indicator lights, dial thermostat adjustable from ambient to 190°F, and temperature read-out dial.
- Top mounted control panel is easy to use and out of the way of brooms, mops, and feet when transporting. Control panel on top eliminates removing control panel for cleaning.
- Fan and air tunnel provide even heat distribution.
- Two 1,000 watt metal sheathed heating elements, 16.7 amps total draw.
- Requires 120 volt, single phase power supply.
- Furnished with top mounted 8 foot power cord with strain relief and NEMA 5-20 plug (except for Canada which comes with a 5-30 plug).
- One year limited parts and labor warranty. After the first year, 10-year parts warranty on the heating elements.



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

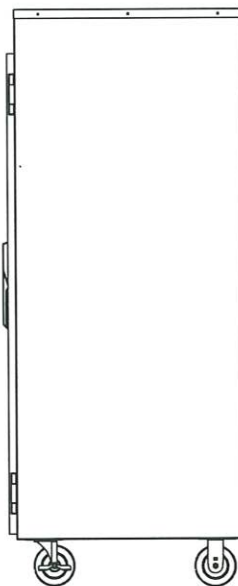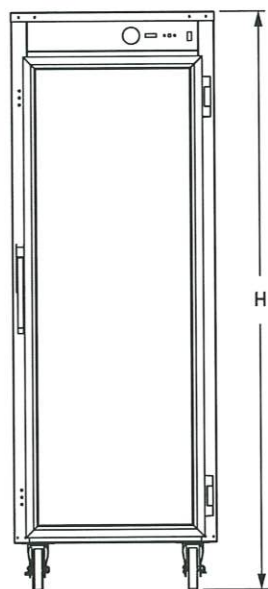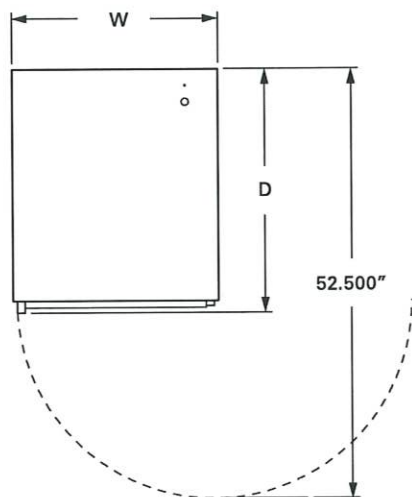

Model Number	Pan Capacity		Exterior Dimensions			Electrical Specifications			Shipping Weight lbs / kg
	18" x 26"	12" x 20"	Width	Depth	Height	Volts	Watts	Amps	
VHFA18	18	36	25 ¹ / ₄ "	30 ³ / ₄ "	71"	120	2,000	16.7	220 / 100

VULCAN

a division of ITW Food Equipment Group LLC


P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

Metro® C5 1 Series

Non-Insulated Heated Holding and Proofing Cabinets

Metro C5 1 Series is a reliable non-insulated solution for proofing and basic holding needs.

- **Control:** Three holding modules are available. All feature an easy-to-read digital thermometer, recessed control dials, a master on/off switch, and power indicator lights.
 - **Combination Module:** At the flip of a switch change from heated holding mode to proofing mode. Individual analog controls for temperature and humidity levels. Digital temperature display.
 - **Holding Module:** For heated holding applications. Analog temperature control with digital display.
 - **Proofing Module:** For proofing applications only. Individual analog controls for temperature and humidity levels. Digital temperature display.
- **Performance:** All modules provide fast heat-up and recovery through a thermostatically controlled, forced air heating system.
- **Sizes:** C5 1 Series cabinets are available in Full Height (69³/₄", 1772mm), ³/₄ Height (57³/₄", 1467mm), and ¹/₂ Height (42³/₄", 1086mm) sizes.
- **Doors:** Clear polycarbonate doors provide visibility of the contents of the cabinet without the heat loss associated with opening the door.
- **Capacity:** Three slide styles provide maximum holding capacity.
 - **Universal:** Adjustable wire slides, with SiteSelect™, hold 18"x26" sheet, 12"x20" steam table, 2/1 or 1/1 GN pans, and adjust on 1¹/₂" (38mm) increments.
 - **Lip Load:** Fixed aluminum extrusions hold 18"x26" sheet pans on 1¹/₂" (38mm) increments.
 - **Fixed Wire:** Fixed slides hold 18"x26" sheet, 12"x20" steam table, 2/1 GN, or 1/1 GN pans on 3" (76mm) increments.
- **Removable Module:** All modules are removable, without tools, for easy cleaning of the cabinet interior. Future module upgrades or changes can occur without cabinet body replacement.
- **Reliability:** Reliability and durability are designed into every C5. High quality components provide a long life of worry-free use.

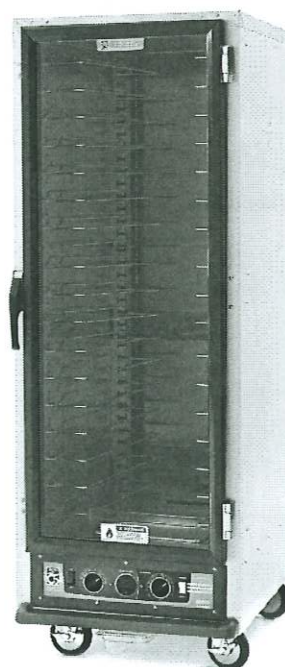

Full Height
Fixed Slides
Combination Module



1/2 Height
Fixed Slides
Combination Module



3/4 Height
Fixed Slides
Combination Module



1 Series Removable Control Modules

- **Holding Module:** Hot holding at higher temperatures without moisture control.*
- **Proofing Module:** Proofing at lower temperatures. Heat and moisture control for proofing applications.
- **Combination Module:** Hot holding and proofing. Moisture control at lower temperatures (proofing).

* Note: Cabinets with holding module do not include the water pan.

All Metro Catalog Sheets are available on our website: metro.com

LO3-269 | 10/24

Information and specifications are subject to change without notice.
Please confirm at time of order.
Copyright © 2024 InterMetro Industries Corp.

metro.com


North Washington Street, Wilkes-Barre, PA 18705

Product Information. U.S. and Canada: 1.800.992.1776
Outside U.S. and Canada: metro.com/contactus

Metro® C5 1 Series

Non-Insulated Heated Holding and Proofing Cabinets

Specifications

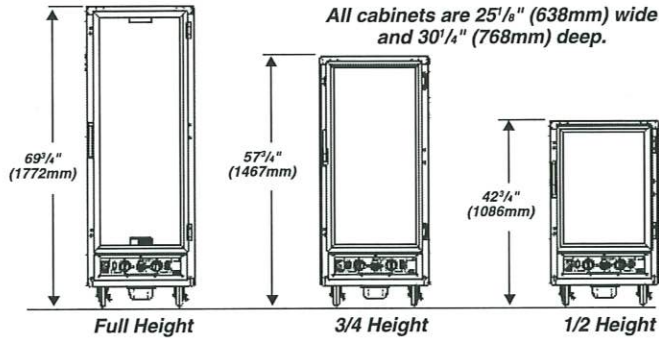

- Cabinet Material:** .063" (1.8mm) aluminum, natural interior, brushed exterior with .125" (3.2mm) aluminum chassis.
- Casters:** Four casters with 5" (127mm) donut neoprene wheel, double ball bearing swivel, ball bearing axel, nickel plated, two with brake.
- Clear Doors:** Extruded aluminum powder coated frame with .090" (2.3mm) polycarbonate window.
- Hinges:** Field reversible, double hinged, 180° swing, with long-life nylon bearings.
- Gaskets:** High temperature, door mounted, Santoprene gaskets.
- Latches:** Polymer, high-strength, magnetic pull latch with lever-action release.
- Universal Slides:** 1/4" (6.4mm) dia. nickel-chrome electroplated wire, adjustable on 1 1/2" (38mm) increments.
- Lip Load Slides:** 1 1/2" x 1/2" x .063" (38x38x1.8mm) extruded aluminum channel slides, 1 1/2" (38mm) fixed spacing.
- Fixed Wire Slides:** 1/4" (6.4mm) dia. nickel-chrome electroplated wire, welded on 3" (76mm) spacing.
- Drip Trough:** Smooth polymer drip trough with catch pan.
- Holding Modules:** Removable without tools, digital thermometer, recessed control dials, master on/off switch, "Power On" light, water pan, ball bearing blower forced air system, 7 1/2' cord, UL, CUL, and NSF Listed.

Electrical and Performance:

- Combination Module:** 80°F (27°C) to 190°F (88°C) operating temperature range. 95% RH at 95°F (35°C). Available in 120V 2000W & 1440W, and 220-240V 1681-2000W configurations.
- Holding Module:** 80°F (27°C) to 190°F (88°C) operating temperature range. Available in 120V 2000W & 1440W, and 220-240V 1681-2000W configurations.
- Proofing Module:** 80°F (27°C) to 120°F (49°C) operating temperature range. 95% RH at 95°F (35°C). Available in 120V 1440W, and 220-240V 1210-1440W configurations.

Slide Capacities:

Cabinet Size	Universal Wire Pan Capacity**				Lip Load Pan Capacity		Fixed Wire Pan Capacity	
	Slide Pairs		18"x26"	12"x20"x2.5" GN 1/1	18"x26"	12"x20"x2.5" GN 1/1	18"x26"	12"x20"x2.5" GN 1/1
	Provided	Max.*						
Full Height	18	37	18	34	35	18	18	34
3/4 Height	14	29	14	26	27	14	14	26
1/2 Height	9	17	8	16	17	8	8	16

*Maximum number of slide pairs @ 1 1/2" spacing. Additional slide pairs ordered separately.

**Capacity based on standard number of slides provided.

Cabinet Height
9 = Full Height
7 = 3/4 Height
5 = 1/2 Height

Module Type
C = Combination
H = Heated Holding
P = Proofing

Slide Type
U = Universal Wire
4 = Fixed Wire
L = Lip Load Aluminum

C519-CFC-U



For Combination and Holding Module Cabinets (120V, 16A, 60Hz, 2000W)

Door Style
FC = Full Length Clear



For Proofing Module Cabinets (120V, 12A, 60Hz, 1440W)

Export Model Number Description

C519-CXFC-U



Add "X" for Export Cabinets

For Combination and Holding Modules (220-240V, 7.6-8.3A, 50/60Hz, 1681-2000W)

For Proofing Modules (220-240V, 5.5-6A, 50/60Hz, 1210-1440W)

Models with Accessories or Options

C519-CFC-UA

An "A" suffix indicates that accessories need to be factory assembled to the cabinet. Order accessories separately.

Options/Accessories

- Small Item Shelf (C5-SHELF-S)
- Stainless Steel Legs (C5-SSLEGS)
- Universal Slide Pair, Chrome (C5-USLIDEPR-C)
- 6" Casters (C5-6CASTER)
- Rear Rigid Casters (C5-5RDGCSTR)
- Travel Latch (C5-TRVL)
- Flush Door Latch (C5-LATCHFLUSH-1)
- Rear Push Handle (C5-RHANDLE)
- Perimeter Bumper (C5-PERMBUMP-1)
- Straight Plug, 20 Amp, 120V (C5-STRPLG-20)
- Straight Plug, 15 Amp, 120V (C5-STRPLG-15)
- Factory Left-Hand Hinging (DD3768)
- Stainless Steel Universal Slides (please call)

Metro Heated cabinets are for hot food holding applications only.

