



Quote

02/12/2024

Project:
54111 Clarinda Community
Schools, IA

From:
Douglas Equipment
Savannah Shrader
301 North St.
Bluefield , WV 24701-4048
304-327-0149
304-327-2909 (Contact)

Job Reference Number: 130408

*****PLEASE ADD 3% FOR CREDIT CARD PURCHASES*****
*****INCLUDES DROP SHIPPING UNLESS NOTED OTHERWISE*****
*****NET 30 ON CASH OR CHECK PURCHASES*****
*****DOES NOT INCLUDE STATE SALES TAX WHERE APPLICABLE*****
*****PLEASE ADD 125.00 IF LIFTGATE IS REQUIRED*****
*****SHIPPING INCLUDED*****
*****<OPTIONAL> ITEMS ARE NOT INCLUDED IN THE PRICE ADD THE AMOUNT IN THE LEFT COLUMN FOR ACCURATE PRICING*****

Item	Qty	Description	Sell	Sell Total
1	1 ea	CONVECTION STEAMER, COUNTERTOP Cleveland Range Model No. 21CET16 Steamcraft® Ultra 5 Convection Steamer, electric, countertop, 1 compartment, (5) 12 x 20 x 2-1/2" pans/compartment capacity, easyTimer 90-minute timer with dial and LED digital readout in minutes and seconds, includes SureCook load compensating thermostat, manual cooking mode and descale indicator, left-hand hinged door, controls on right, automatic water level and generator drain, steam shut-off switch, stainless steel construction, 16 kW	\$9,314.09	\$9,314.09
	1 ea	1-year parts & labor warranty, standard		
	1 ea	5 year pro-rated parts warranty on boilers & steam generators		
	1 ea	3 year Convection Steamer Door Warranty, standard		



Douglas Equipment

02/12/2024

Item	Qty	Description	Sell	Sell Total
	1 ea	Performance start-up included at customer request after equipment is installed (Free Water Quality Check included) (contact Cleveland Sales Representative for details)		
	1 ea	(VOS2) 440-480v/60/3-ph, 18.2-19.9 amps, 3-wire	\$436.83	<Optional>
	1 ea	SMDCK Drain Cooling Kit, small, for countertop steamers (requires 115v/60/1 connection) (not for SteamChef™ models) (P/N FK104658) Please Verify Voltage Prior to Ordering		
			ITEM TOTAL:	\$9,314.09
			Total	\$9,314.09

- DROP SHIP ONLY.
 - NO INSTALLATION REQUESTED; THEREFORE NOT QUOTED.
 - PRICING VALID FOR 30 DAYS
 - PLEASE ADD 3% FOR CREDIT CARD PURCHASES
 - DOES NOT INCLUDE STATE SALES TAX WHERE APPLICABLE
 - SHIPPING INCLUDED BASED OFF OF THE QUANTITY AND LOCATION REQUESTED.
- IF ORDER REFLECTS A DIFFERENT QUANTITY OR LOCATION,
PRICE IS SUBJECT TO CHANGE AT CUSTOMERS EXPENSE.*

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$9,314.09



SteamCraft® Ultra 5

COUNTER TYPE DESIGN, PRESSURELESS CONVECTION
STEAMER, ELECTRIC STEAM GENERATOR, 16 KW

Project _____
Item _____
Quantity _____
FCSI Section 11400 _____
Approved _____
Date _____

Models

- 21-CET-16



Shown with optional
Electronic Timer

Standard Features

- Cooking Capacity for up to five 12" x 20" x 2 1/2" deep Cafeteria Pans.
- Innovative PowerPak Electric Steam Generator: Two Special Stainless Steel Fire Bar Heating Element. Strong 14 Gauge Stainless Steel Construction. Large 5 gallon generator reservoir for faster steam cooking production. Fully insulated rear mounted steam generator.
- Easy Access Cleaning Port: Generator Cleaning Port located on the outside, top of the unit. Not necessary to remove hot panels or pan rack guides.
- Instant Steam Stand By Mode: Hold generator at a steaming temperature. Allows unit to start cooking instantly.
- Durable 14 Gauge, Stainless Steel Construction: For cavity and steam generator.
- One 60 Minute Electro-Mechanical Timer and Switch for manual operation: Audible signal for cooking time completion.
- Main Power On/Off Switch: With Automatic Water Fill.
- Exclusive Steam Cooking Distribution System: Maintenance Free Exclusive Brass Steam Jets produce a high velocity convection steam without fans. Coved Corner design in cooking compartment distributes heat evenly, and is easy to keep clean. Creased top & bottom enhance drainage. Cold water condenser behind drain maintains a dry steam. Fully Insulated cooking compartment for thermal efficiency. Removable Stainless Steel Slide Racks for easy cleaning.
- Automatic Generator Drain: Contains a "Water Jet" Spray Rinse Drain Cleaning Cycle to keep drain clear.
- Exclusive Automatic Remote Probe Type Water Level Control: Separate from the generator for easy access.
- Exclusive "Cool to the Touch" Two-Piece Compartment Door Design: Free floating inner door with reversible gasket provides an air tight seal. Stainless Steel Slam/Latch Door Latch mechanism for reliability.
- Left Hand Door Hinging: Compartment Doors hinged on the left, controls on the right.
- Available in most voltages, three phase only.
- 4" Adjustable Legs

Short Form Specifications

Shall be CLEVELAND, SteamCraft® Ultra 5, one compartment, Counter-Type Steamer, Model 21-CET-16, ___volts, 16.5 KW, ___Hz, 3 phase, heavy duty all Stainless Steel construction; rear mounted, insulated Steam Generator with Remote Probe Type Water Level Controls and Automatic Steam Generator Blowdown with "Water Jet" Drain Cleaning feature.

Options & Accessories

- Right hand Door Hinging, Controls on the Left (DHR)
- Electronic Timer with Compensating Load Feature (ETC)
- 34" (864mm) High Stainless Steel Economy Stand, for one 21-CET-16 (UniStand34)
- POSK Pull-Out Shelf Kit for UniStand (P/N 111724)
- URK Pan Rack Kit UniStand (P/N 111726)
- Equipment Stacking Stand Shelf Type (ES2446)
- Dissolve® Descale Solution, 6 one gallon container w/ quart markings (106174)
- Cafeteria Pans in depths of 1", 2 1/2" and 4"
- Water Filters

Steamcraft® Generator Style High Speed Convection Steamers

KE004046-10

760 Beta Drive, Unit D
Mayfield Village, Ohio 44143


Tel 1.216.481.4900
Fax 1.216.481.3782
Email steam@clevelandrange.com

www.clevelandrange.com
Section 3, Page 3
5586A 06 / 2021






Steamcraft® Generator Style High Speed Convection Steamers

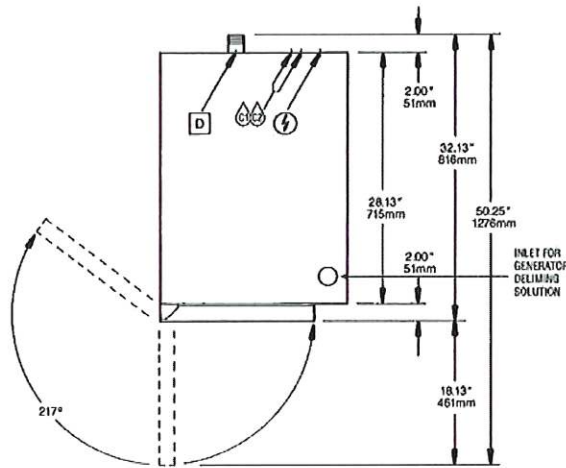


TOP VIEW

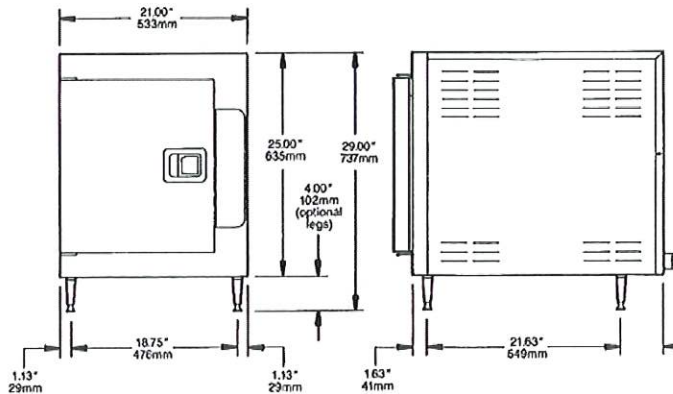

FRONT VIEW

RIGHT SIDE VIEW

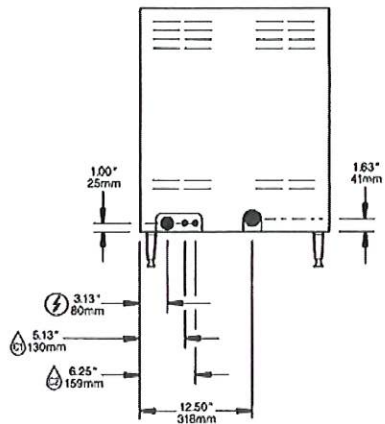

REAR VIEW

COMPARTMENT HAS CAPACITY FOR:
 • Five, 12" x 20" x 2 1/2" deep Cafeteria Pans

WATER QUALITY REQUIREMENTS (Boilers, Generators)	
TDS:	50-250 ppm
Hardness:	50 - 200 mm (3 - 12 gpg)
pH value:	7.0 - 8.5
CL (Chloride):	max 50 ppm
Cl2 (free chlorine):	max 0.1 ppm
SiO2 (silica):	max 13 ppm
NH2Cl: (mono-chloramine)	max 0.1 ppm
Total Alkalinity:	50 - 100 ppm

SHIPPING WEIGHTS & DIMENSIONS			
Weight	Width	Depth	Height
248 lbs	30"	35"	36"

ELECTRIC ⚡					WATER 💧		DRAINAGE [D]	CLEARANCE
Volts	Watts	Ph	Amps	Wire	Cold water: 35 psi min., 60 psi max.		1 1/2" N.P.T. IPS-M	Right - 3", Left - 3", Rear - 3" (12" on control side if adjoining wall or equipment is over 30" high for service access) Contact factory for variances to clearances.
208	16,300	3	45.9	3	Two 3/4" NH-F (Garden Thread) Connections.		Do not connect other units to this drain.	
240	16,300	3	39.8	3	Use NSF approved hose.		Drain line must be vented.	
440	13,694	3	18.2	3	C1 one for Condenser		No PVC pipe for drain.	
480	16,300	3	19.9	3	C2 one for Steam Generator			
360	14,621	3	23.8	4				
380	16,300	3	25.1	4				
415	16,300	3	23.0	4				

NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted.
 Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.
 Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are UL/NSF#4.

(NOT TO SCALE)

760 Beta Drive, Unit D
 Mayfield Village, Ohio 44143

Tel 1.216.481.4900
 Fax 1.216.481.3782
 Email steam@clevelandrange.com

www.clevelandrange.com
 Section 3, Page 4
 06 / 2021

